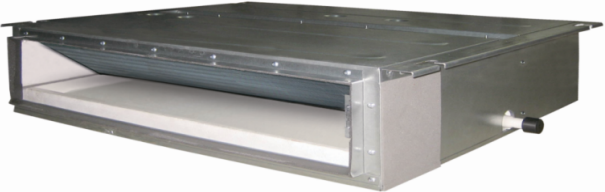



Submittal Data: GFH12EA-D3DNA1A/I		12,000 BTU/H Free Match Ducted Unit	
Job Name		Location	
Purchaser		Date	
Submitted to:		Engineer	
Unit Designation		For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
		Schedule No.	
GENERAL FEATURES - Cooling, Heating, Dehumidifying - Low Ambient Cooling & Heating - Low Static Pressure - Intelligent Preheating			
Specifications		Indoor Unit Data	
Fan Specifications		Gas Pipe Diameter	
Fan Type	Centrifugal		9.52 mm
Fan Motor Speed (Min-Max)	700-960 rpm	Liquid Pipe Diameter	3/8 - in
Output of Fan Motor	49 W		6.35 mm
Input of Fan Motor	80 W	Sound Pressure Level (Min-Max)	1/4 - in
Fan Motor FLA	0,31 A		32-39 dB (A)
Airflow Volume (Min-Max)	177 - 324 CFM	Dimensions & Weights	
Capacity		Unit Dimensions (LxHxD)	700 x 200 x 615 mm
Cooling Capacity	11,900 BTU/H		27.6 x 7.9 x 24.2 - in
Heating Capacity	13,100 BTU/H	Weight (Net/Shipping)	23 / 29 kg
			50.7 / 63.9 lbs
			

Construction Views

Duct Type

GFH12EA-D3DNA1A/I

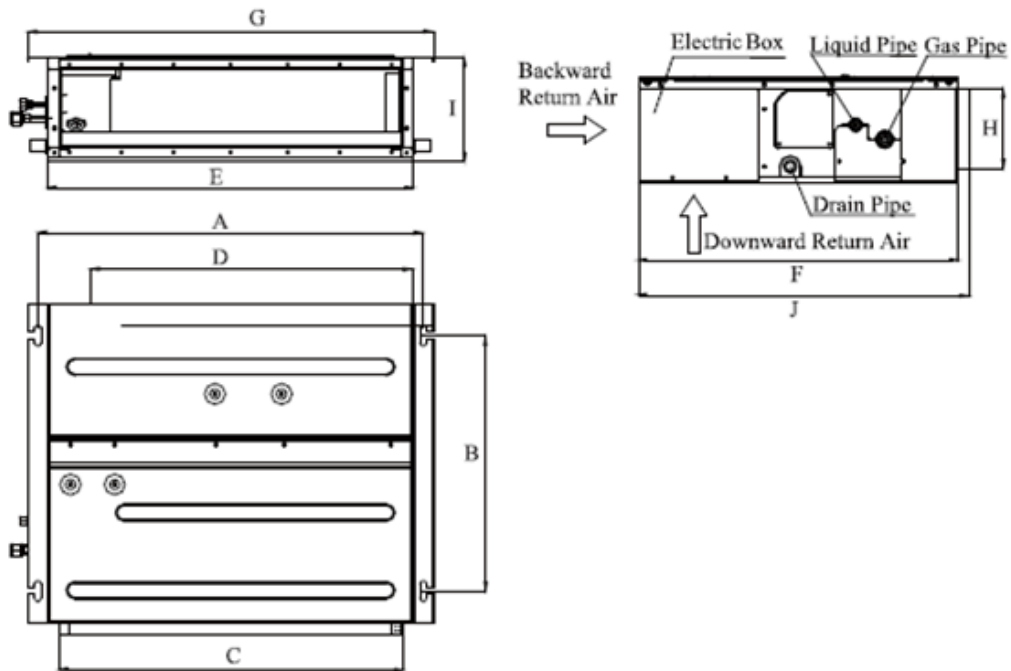


Table Outline Dimensions:

Model \ Item	A	B	C	D	E	F	G	H	I	J
GFH12EA-D3DNA1A/I	742 (29.2)	491 (19.3)	662 (26.1)	620 (24.4)	700 (27.6)	615 (24.2)	782 (30.8)	156 (6.1)	200 (7.9)	635 (25)

* Unit = mm
(inch)