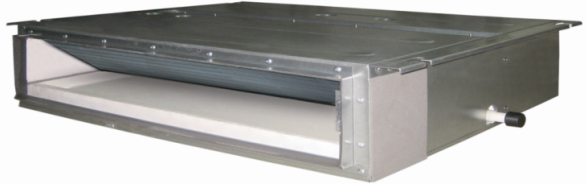



Submittal Data: GFH18EA-D3DNA1A/I		18,000 BTU/H Free Match Ducted Unit	
Job Name		Location	
Purchaser		Date	
Submitted to:		Engineer	
Unit Designation		For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
		Schedule No.	
GENERAL FEATURES - Cooling, Heating, Dehumidifying - Low Ambient Cooling & Heating - Low Static Pressure - Intelligent Preheating			
Specifications		Indoor Unit Data	
Fan Specifications		Gas Pipe Diameter	
Fan Type	Centrifugal		12.70 mm
Fan Motor Speed (Min-Max)	720-920 rpm		1/2 - in
Output of Fan Motor	75 W	Liquid Pipe Diameter	6.35 mm
Input of Fan Motor	100 W		1/4 - in
Fan Motor FLA	0,41 A	Sound Pressure Level (Min-Max)	33-41 dB (A)
Airflow Volume	412 CFM	Dimensions & Weights	
Capacity		Unit Dimensions (LxHxD)	900 x 200 x 615 mm
Cooling Capacity	15,300 BTU/H		35.4 x 7.9 x 24.2 - in
Heating Capacity	18,700 BTU/H	Weight (Net/Shipping)	27/36 kg
			59.5 / 79.4 lbs
			

Construction Views

Duct Type

GFH18EA-D3DNA1A/I

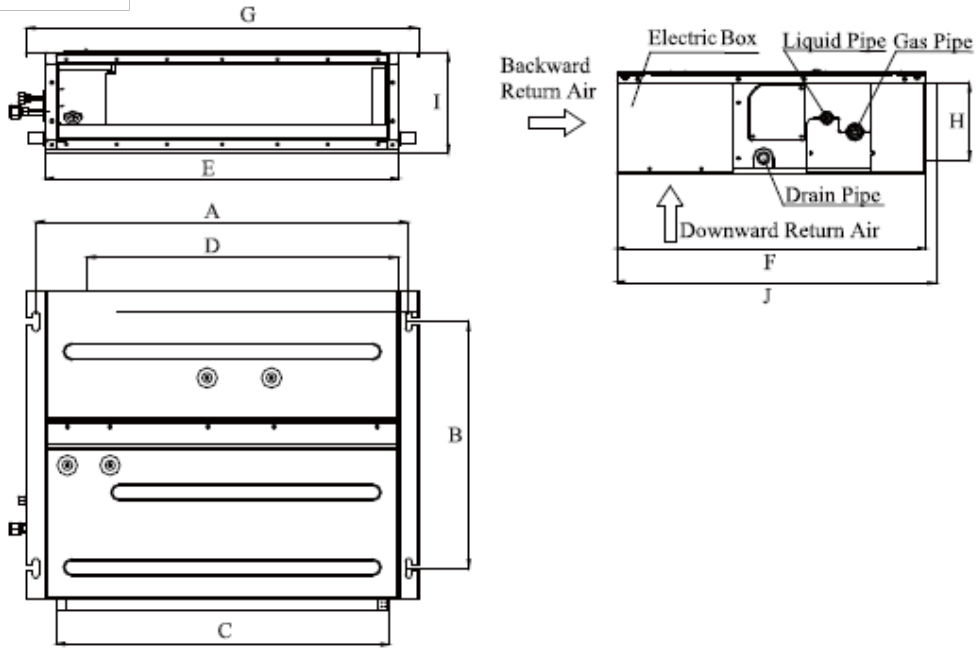


Table Outline Dimensions:

Model \ Item	A	B	C	D	E	F	G	H	I	J
GFH18EA-D3DNA1A/I	942 (37.1)	491 (19.3)	862 (33.9)	820 (32.3)	900 (35.4)	615 (24.2)	982 (38.7)	156 (6.1)	200 (7.9)	635 (25)

* Unit = mm
(inch)