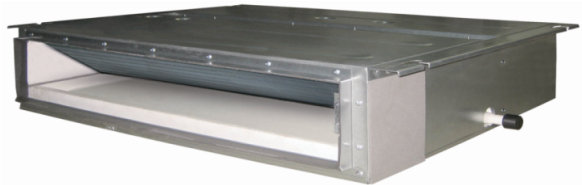



<b>Submittal Data: GFH21EA-D3DNA1A/I</b>		21,000 BTU/H Free Match Ducted Unit
Job Name	Location	Date
Purchaser	Engineer	
Submitted to:	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Unit Designation	Schedule No.	
<b>GENERAL FEATURES</b> - Cooling, Heating, Dehumidifying - Low Ambient Cooling & Heating - Low Static Pressure - Intelligent Preheating		
Specifications		Indoor Unit Data
<b>Fan Specifications</b>		Gas Pipe Diameter
Fan Type	Centrifugal	15.90 mm
Fan Motor Speed (Min-Max)	680-985 rpm	5/8 - in
Output of Fan Motor	22,5 W	Liquid Pipe Diameter
Input of Fan Motor	124 W	9.52 mm
Fan Motor FLA	0,5 A	3/8 - in
Airflow Volume	589 CFM	<b>Sound Pressure Level (Min-Max)</b>
<b>Capacity</b>		34-42 dB (A)
Cooling Capacity	20,400 BTU/H	<b>Dimensions &amp; Weights</b>
Heating Capacity	22,600 BTU/H	Unit Dimensions (LxHxD)
		1100 x 200 x 615 mm
		43.3 x 7.9 x 24.2 - in
		Weight (Net/Shipping)
		31/41 kg
		68.3 / 90.4 lbs
		

## Construction Views

Duct Type

GFH21EA-D3DNA1A/I

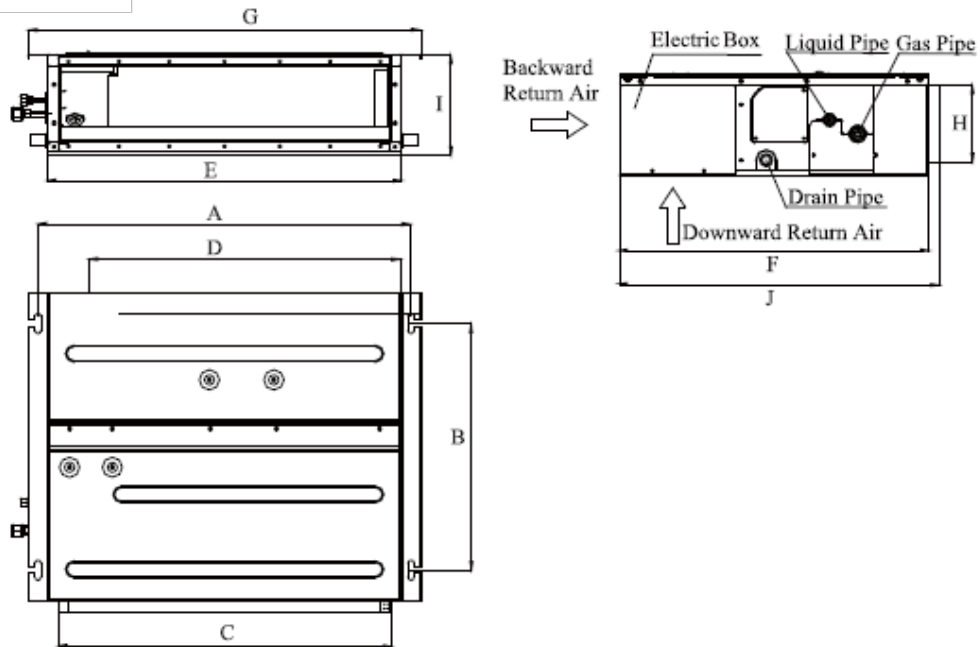


Table Outline Dimensions:

Model \ Item	A	B	C	D	E	F	G	H	I	J
GFH21EA-D3DNA1A/I	1142 (45)	491 (19.3)	1062 (41.8)	1020 (40.2)	1100 (43.3)	615 (24.2)	1182 (46.5)	156 (6.1)	200 (7.9)	635 (25)

\* Unit = mm  
(inch)